

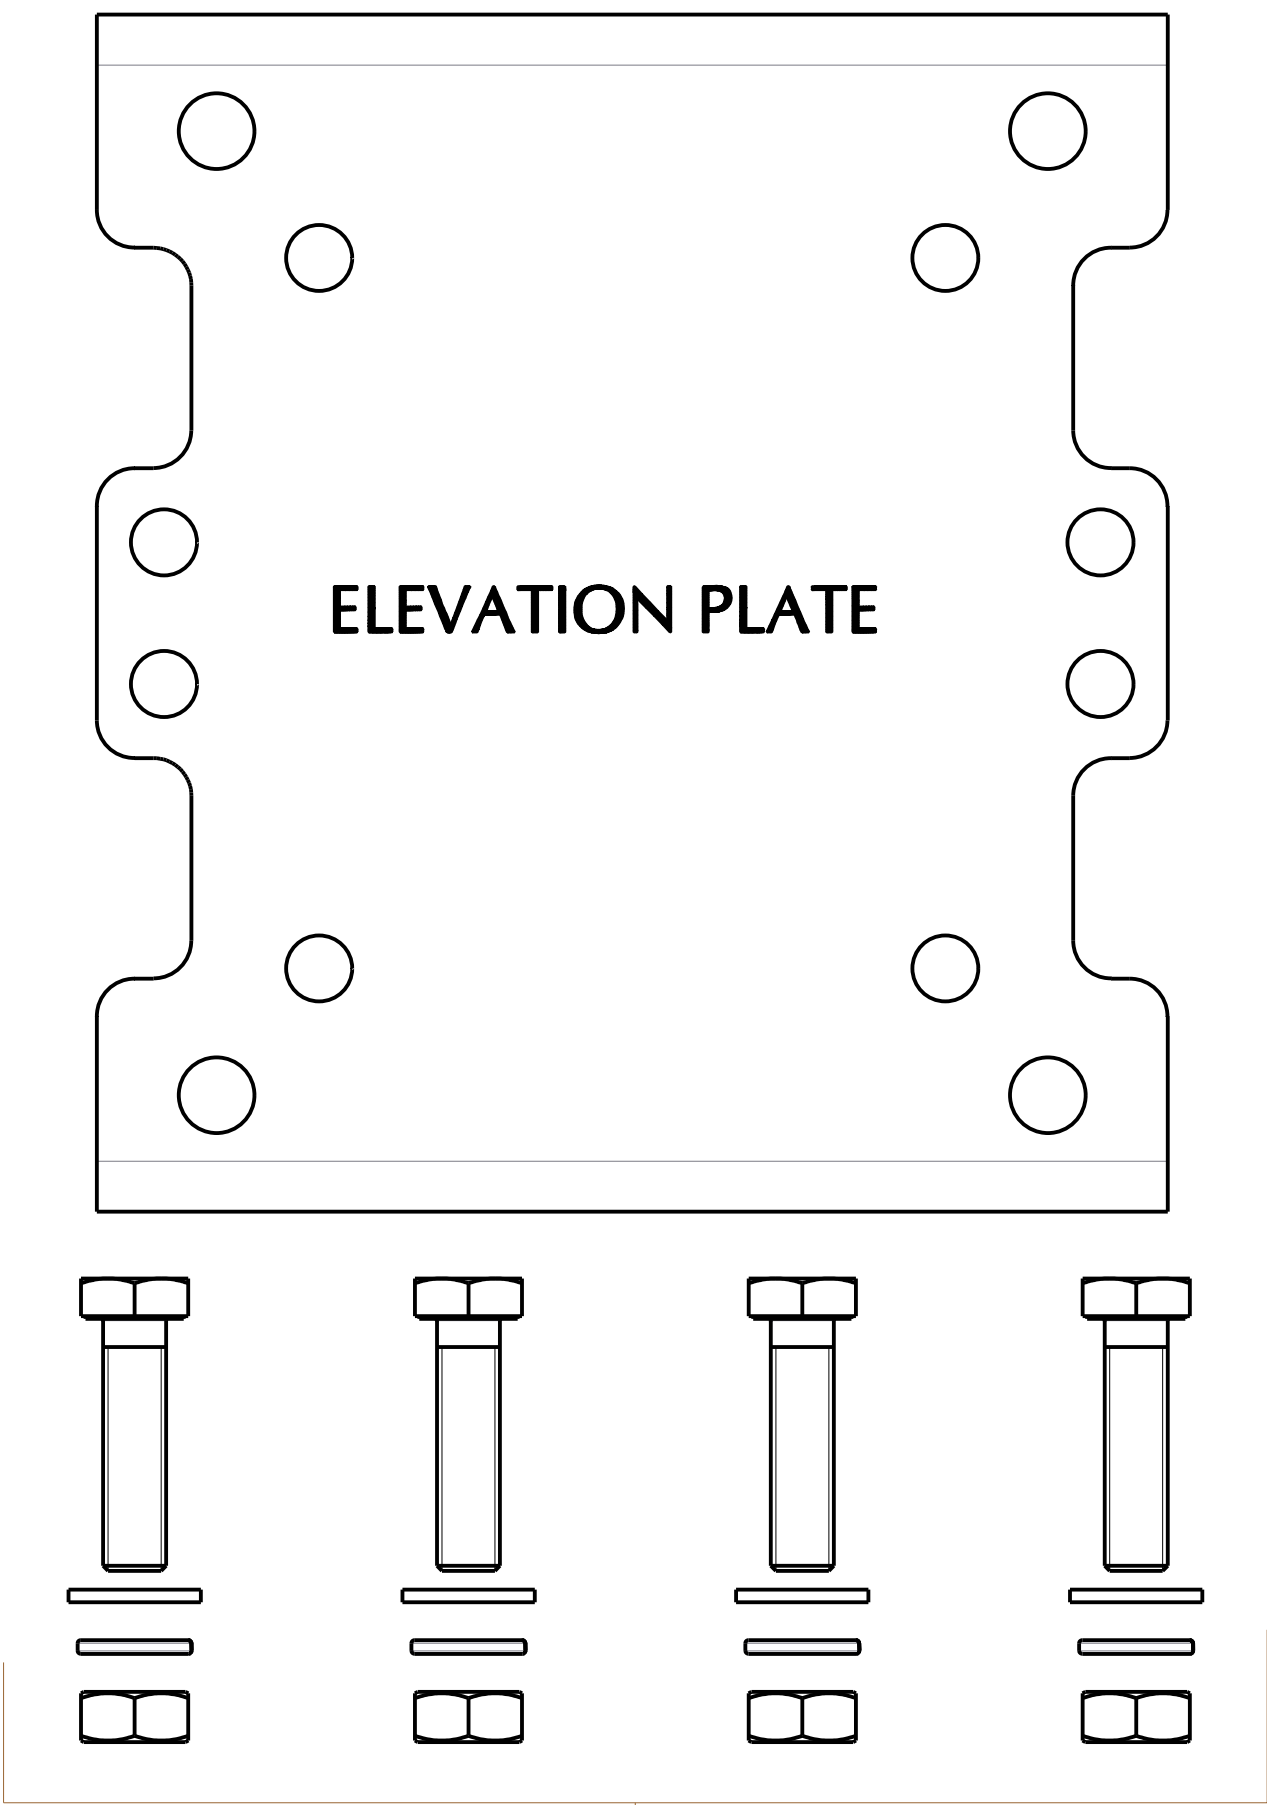
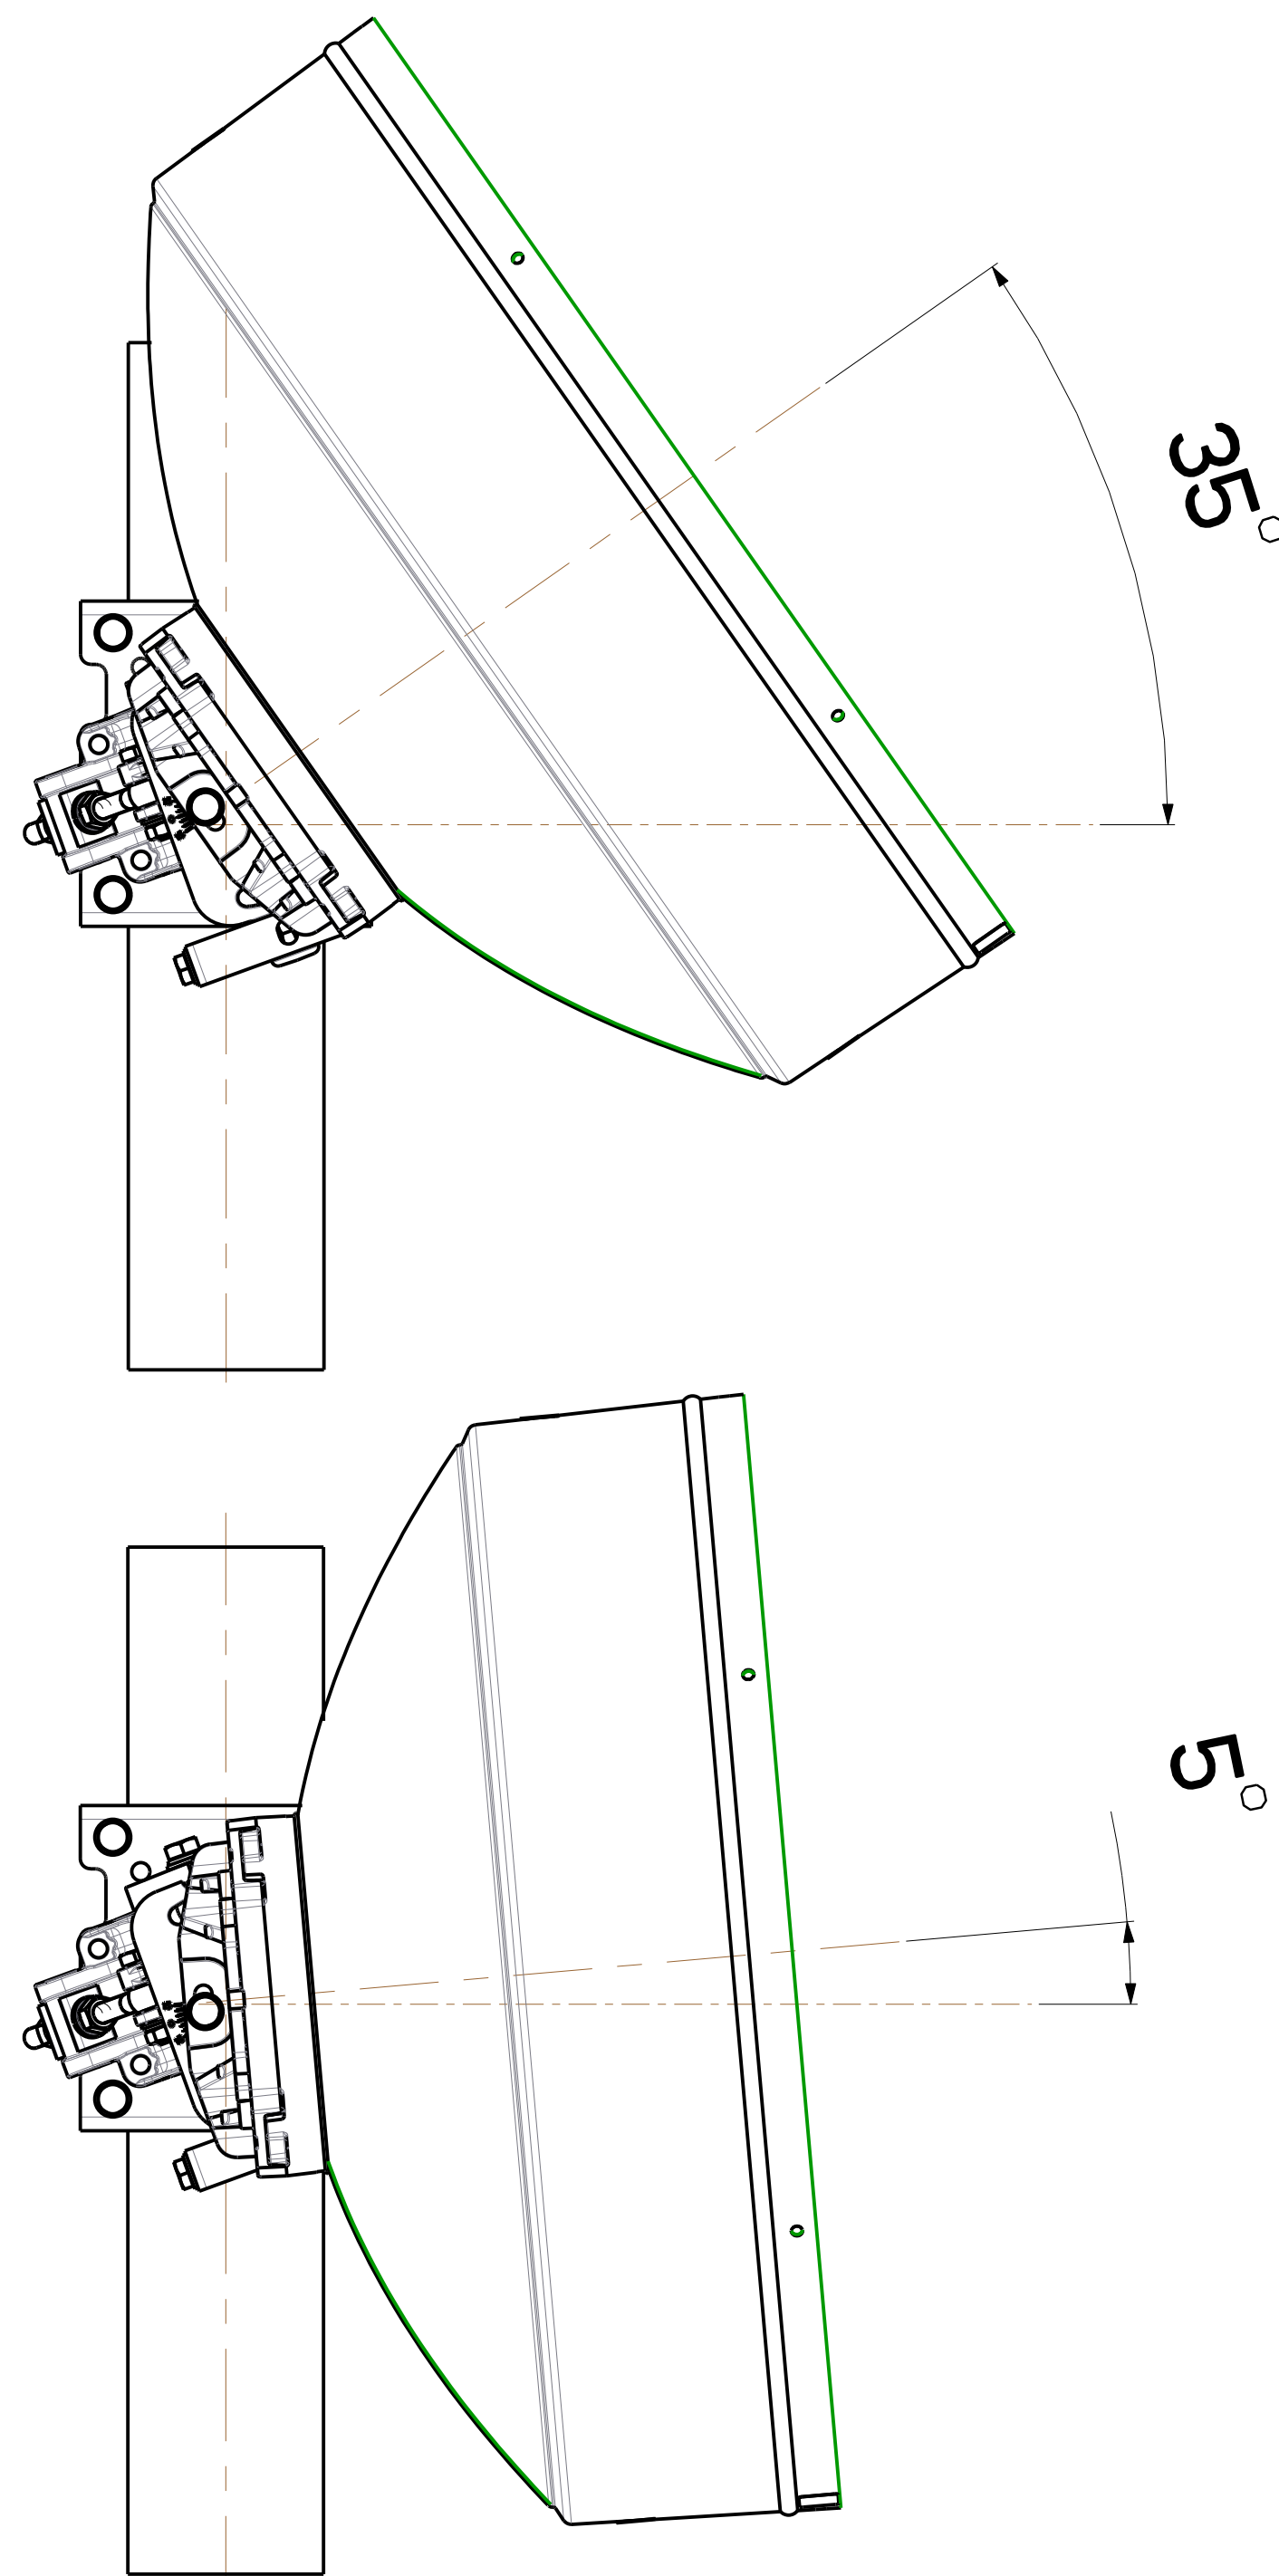
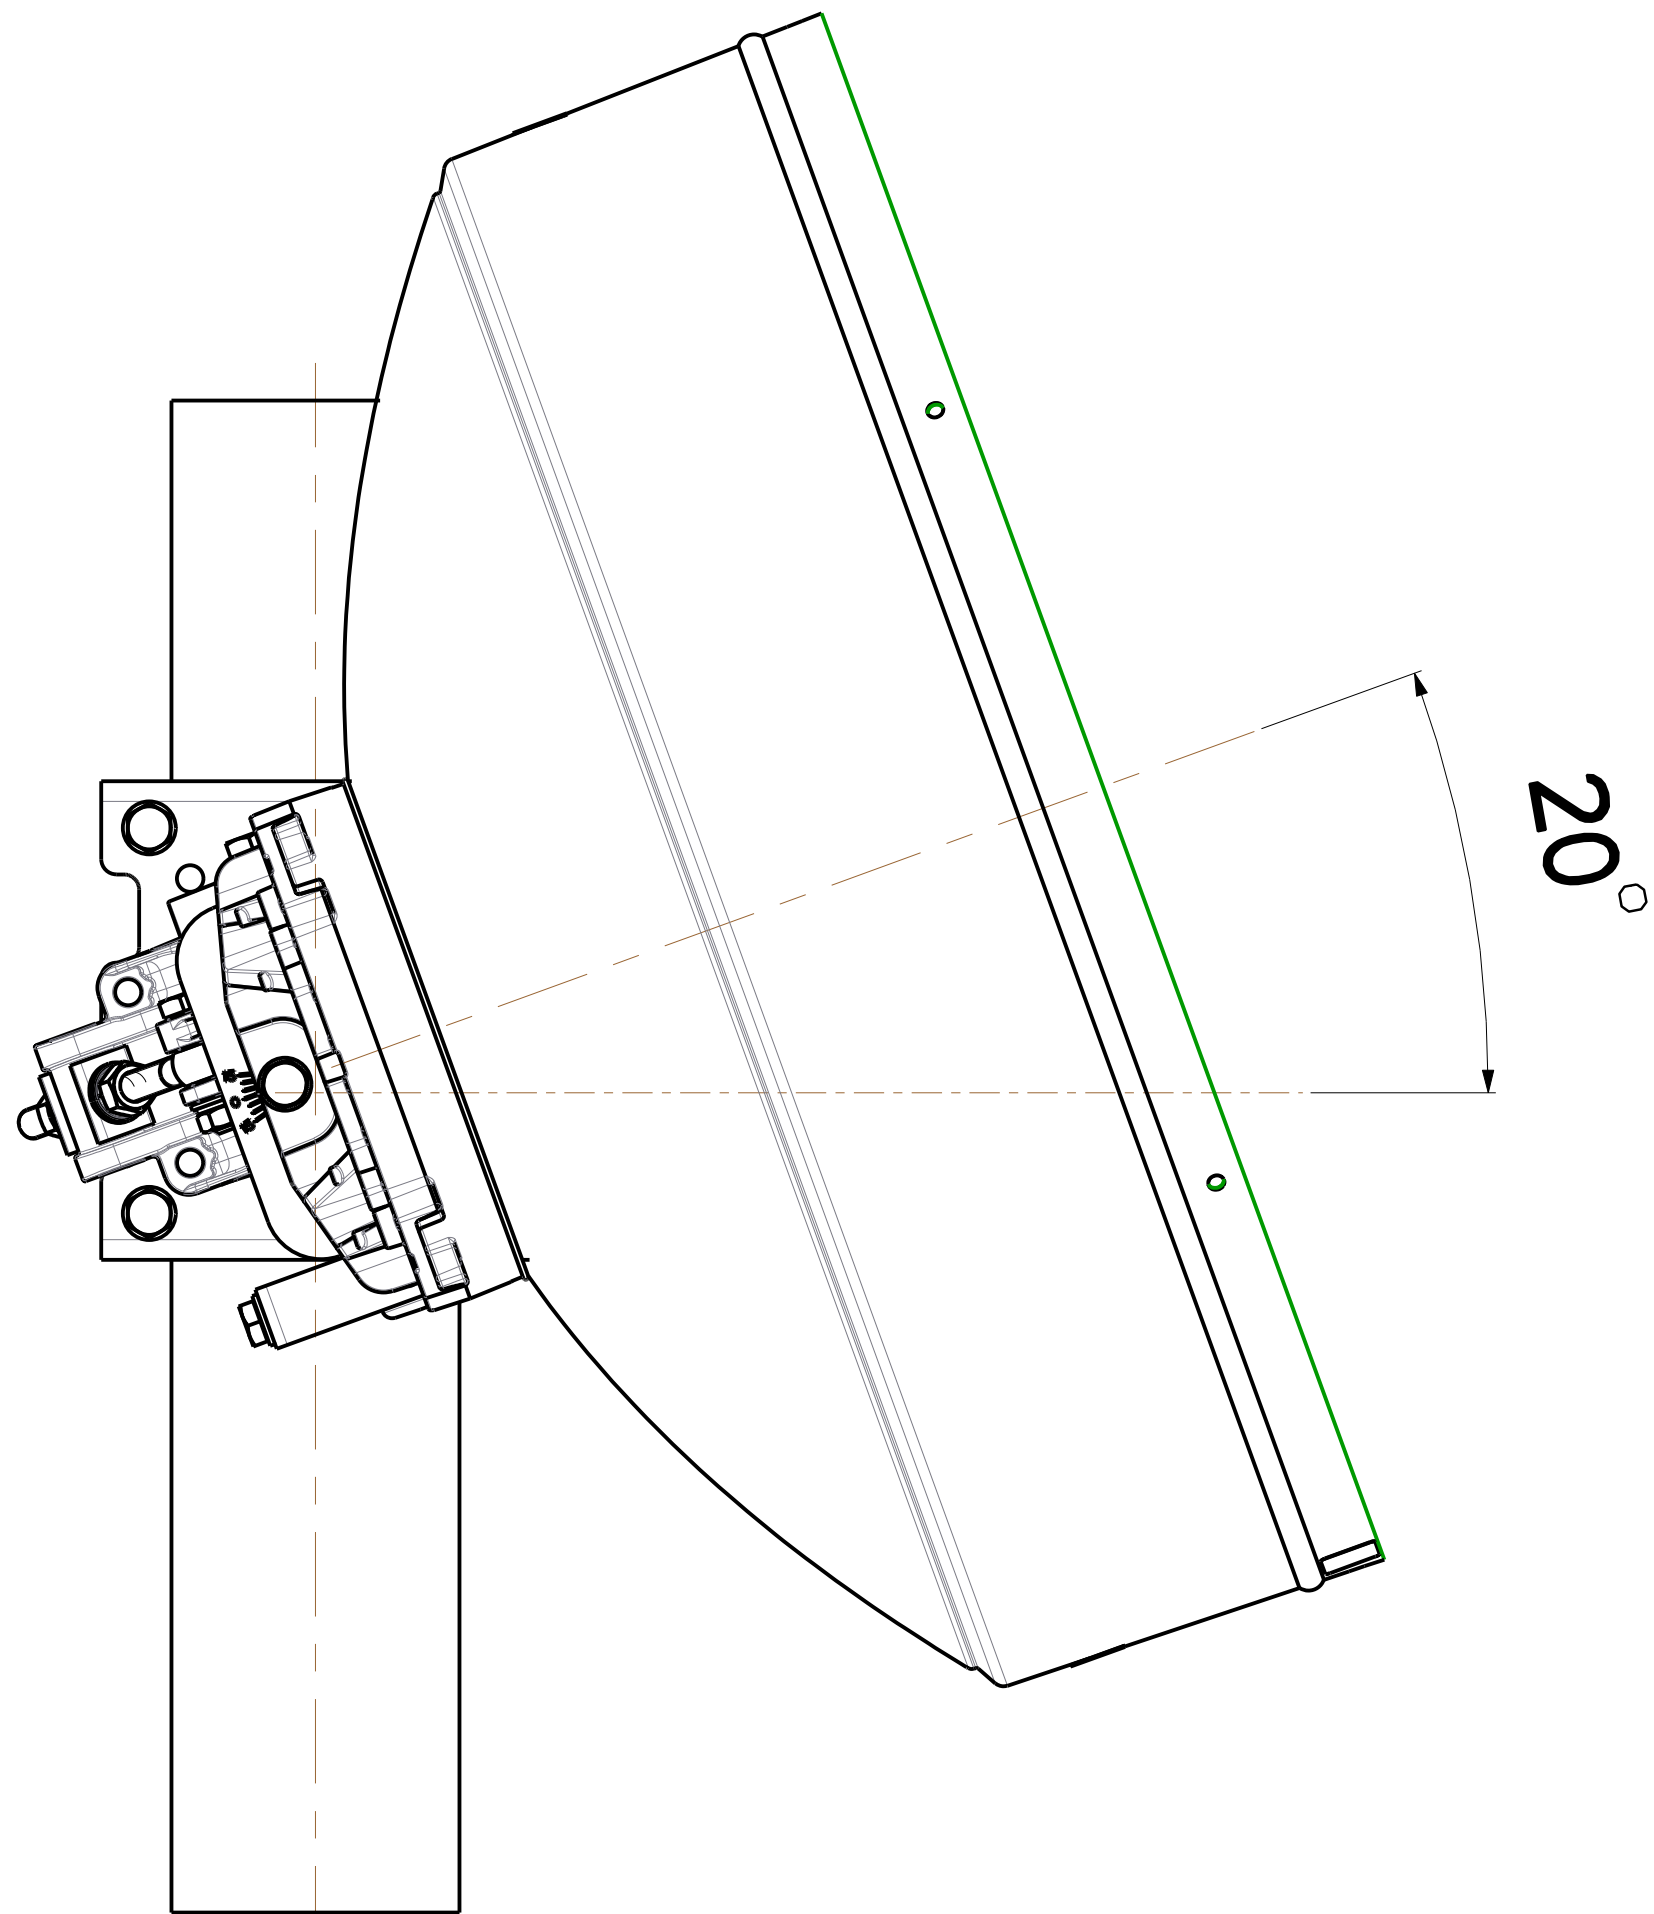


STEP 2A (Elevation range +35°/+5°)

Fix the pole mount in "A" position (+20°)
to adjust the elevation from +5° to +35°

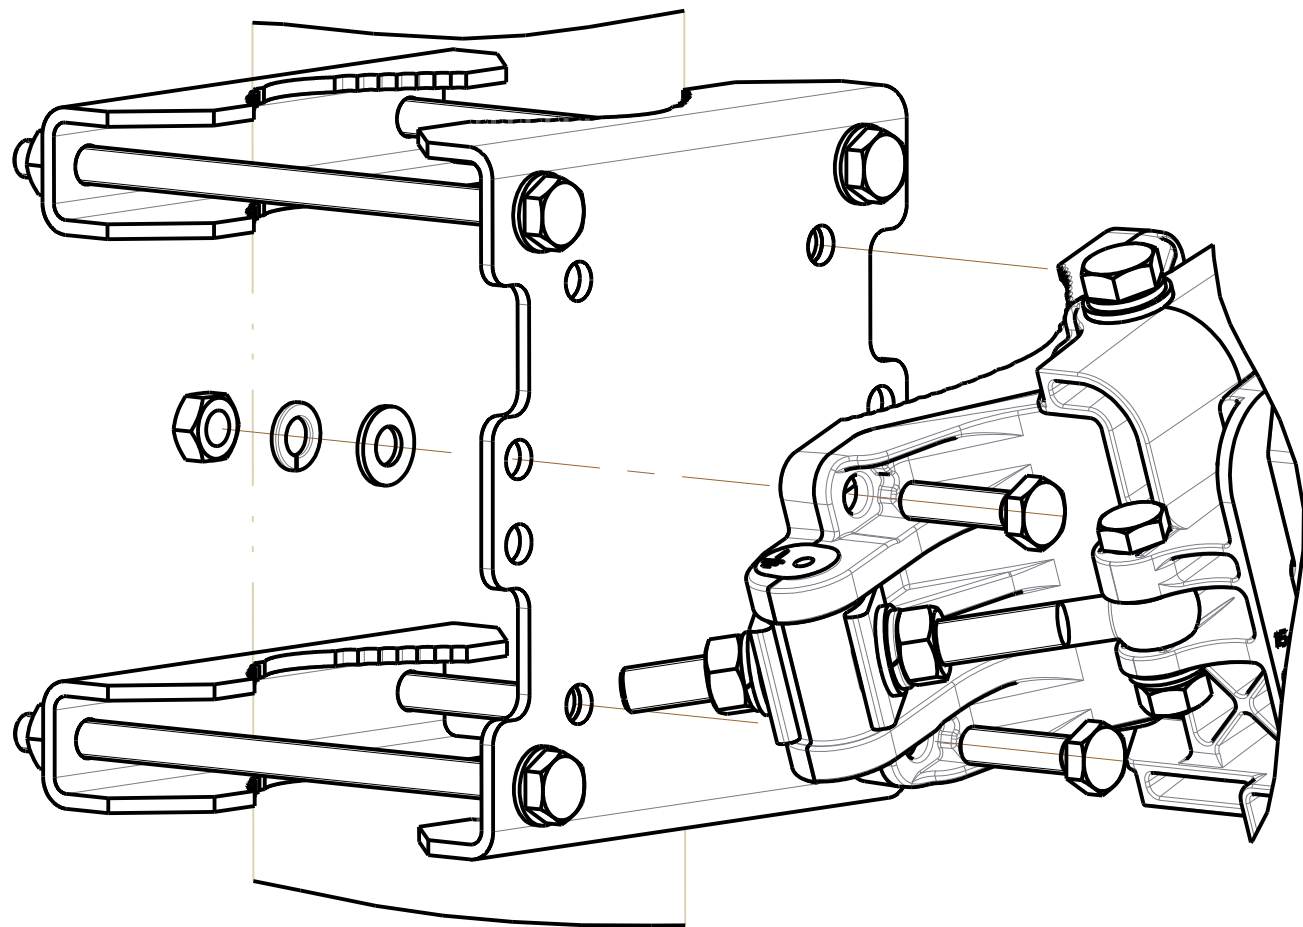


HEX HEAD M10x40 BOLTS
WITH WHASERS AND NUTS

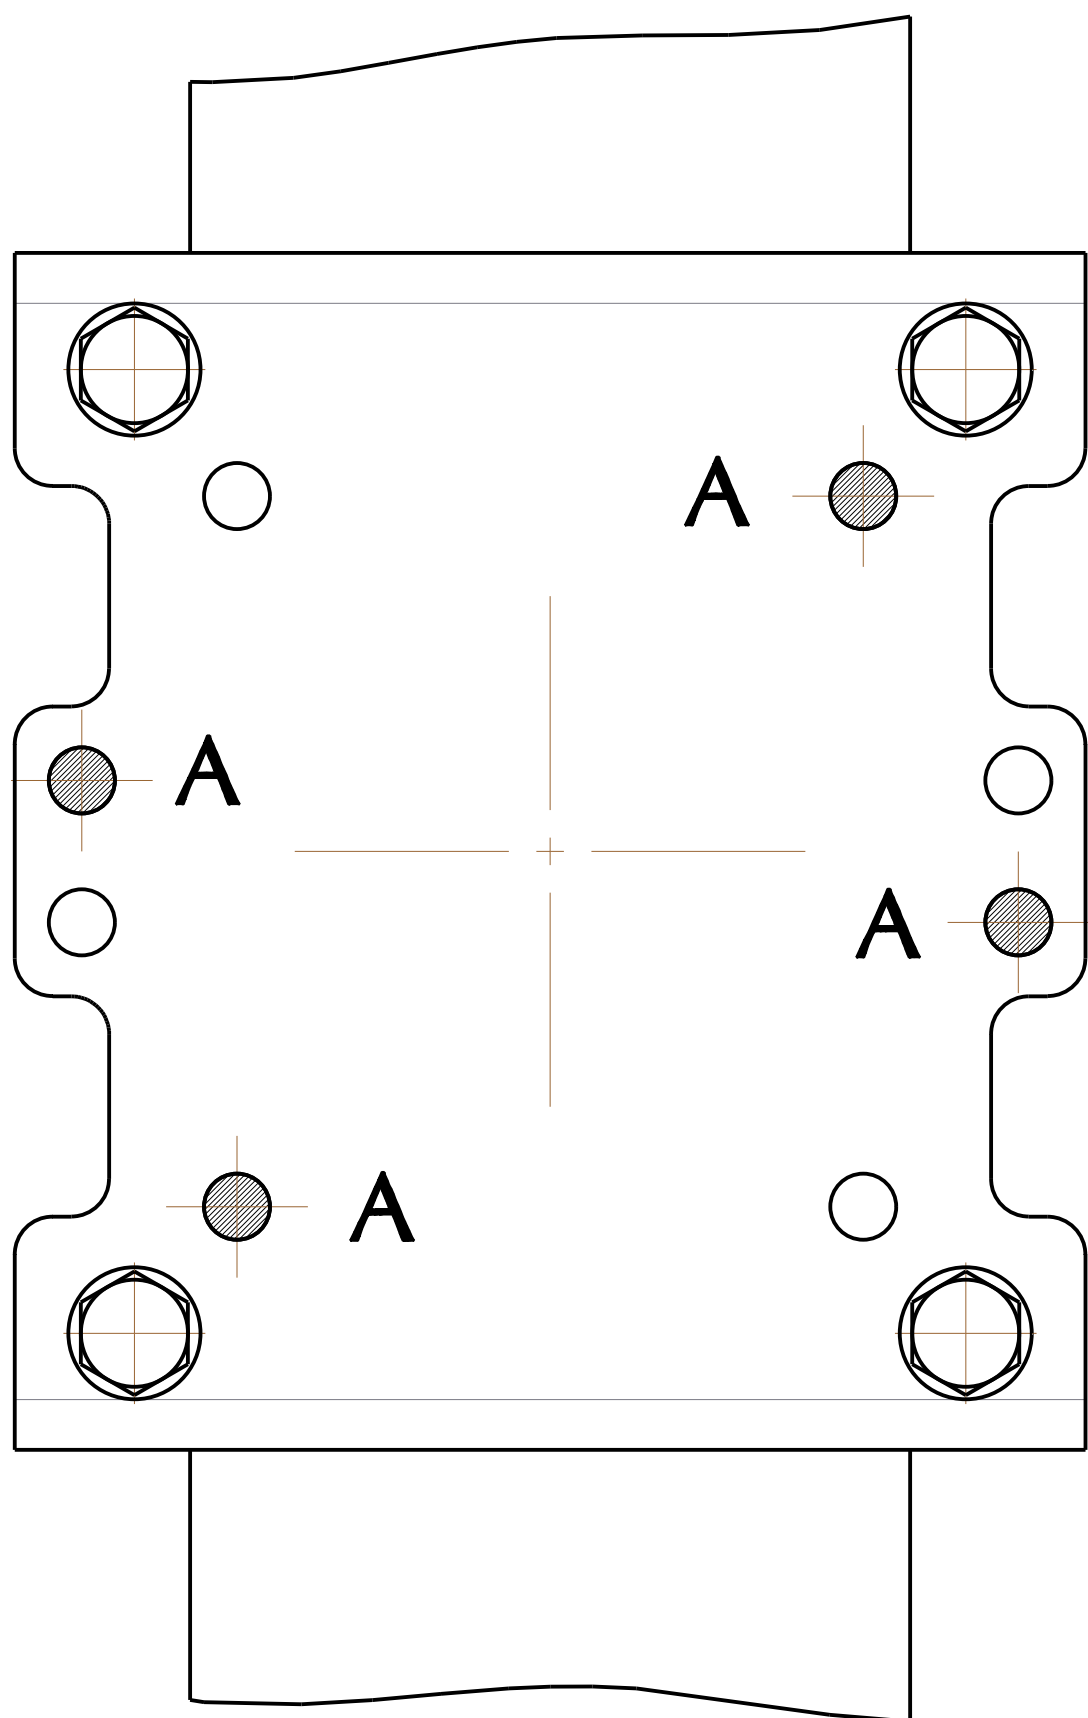

STEP 1:

Fix the elevation plate on the pole

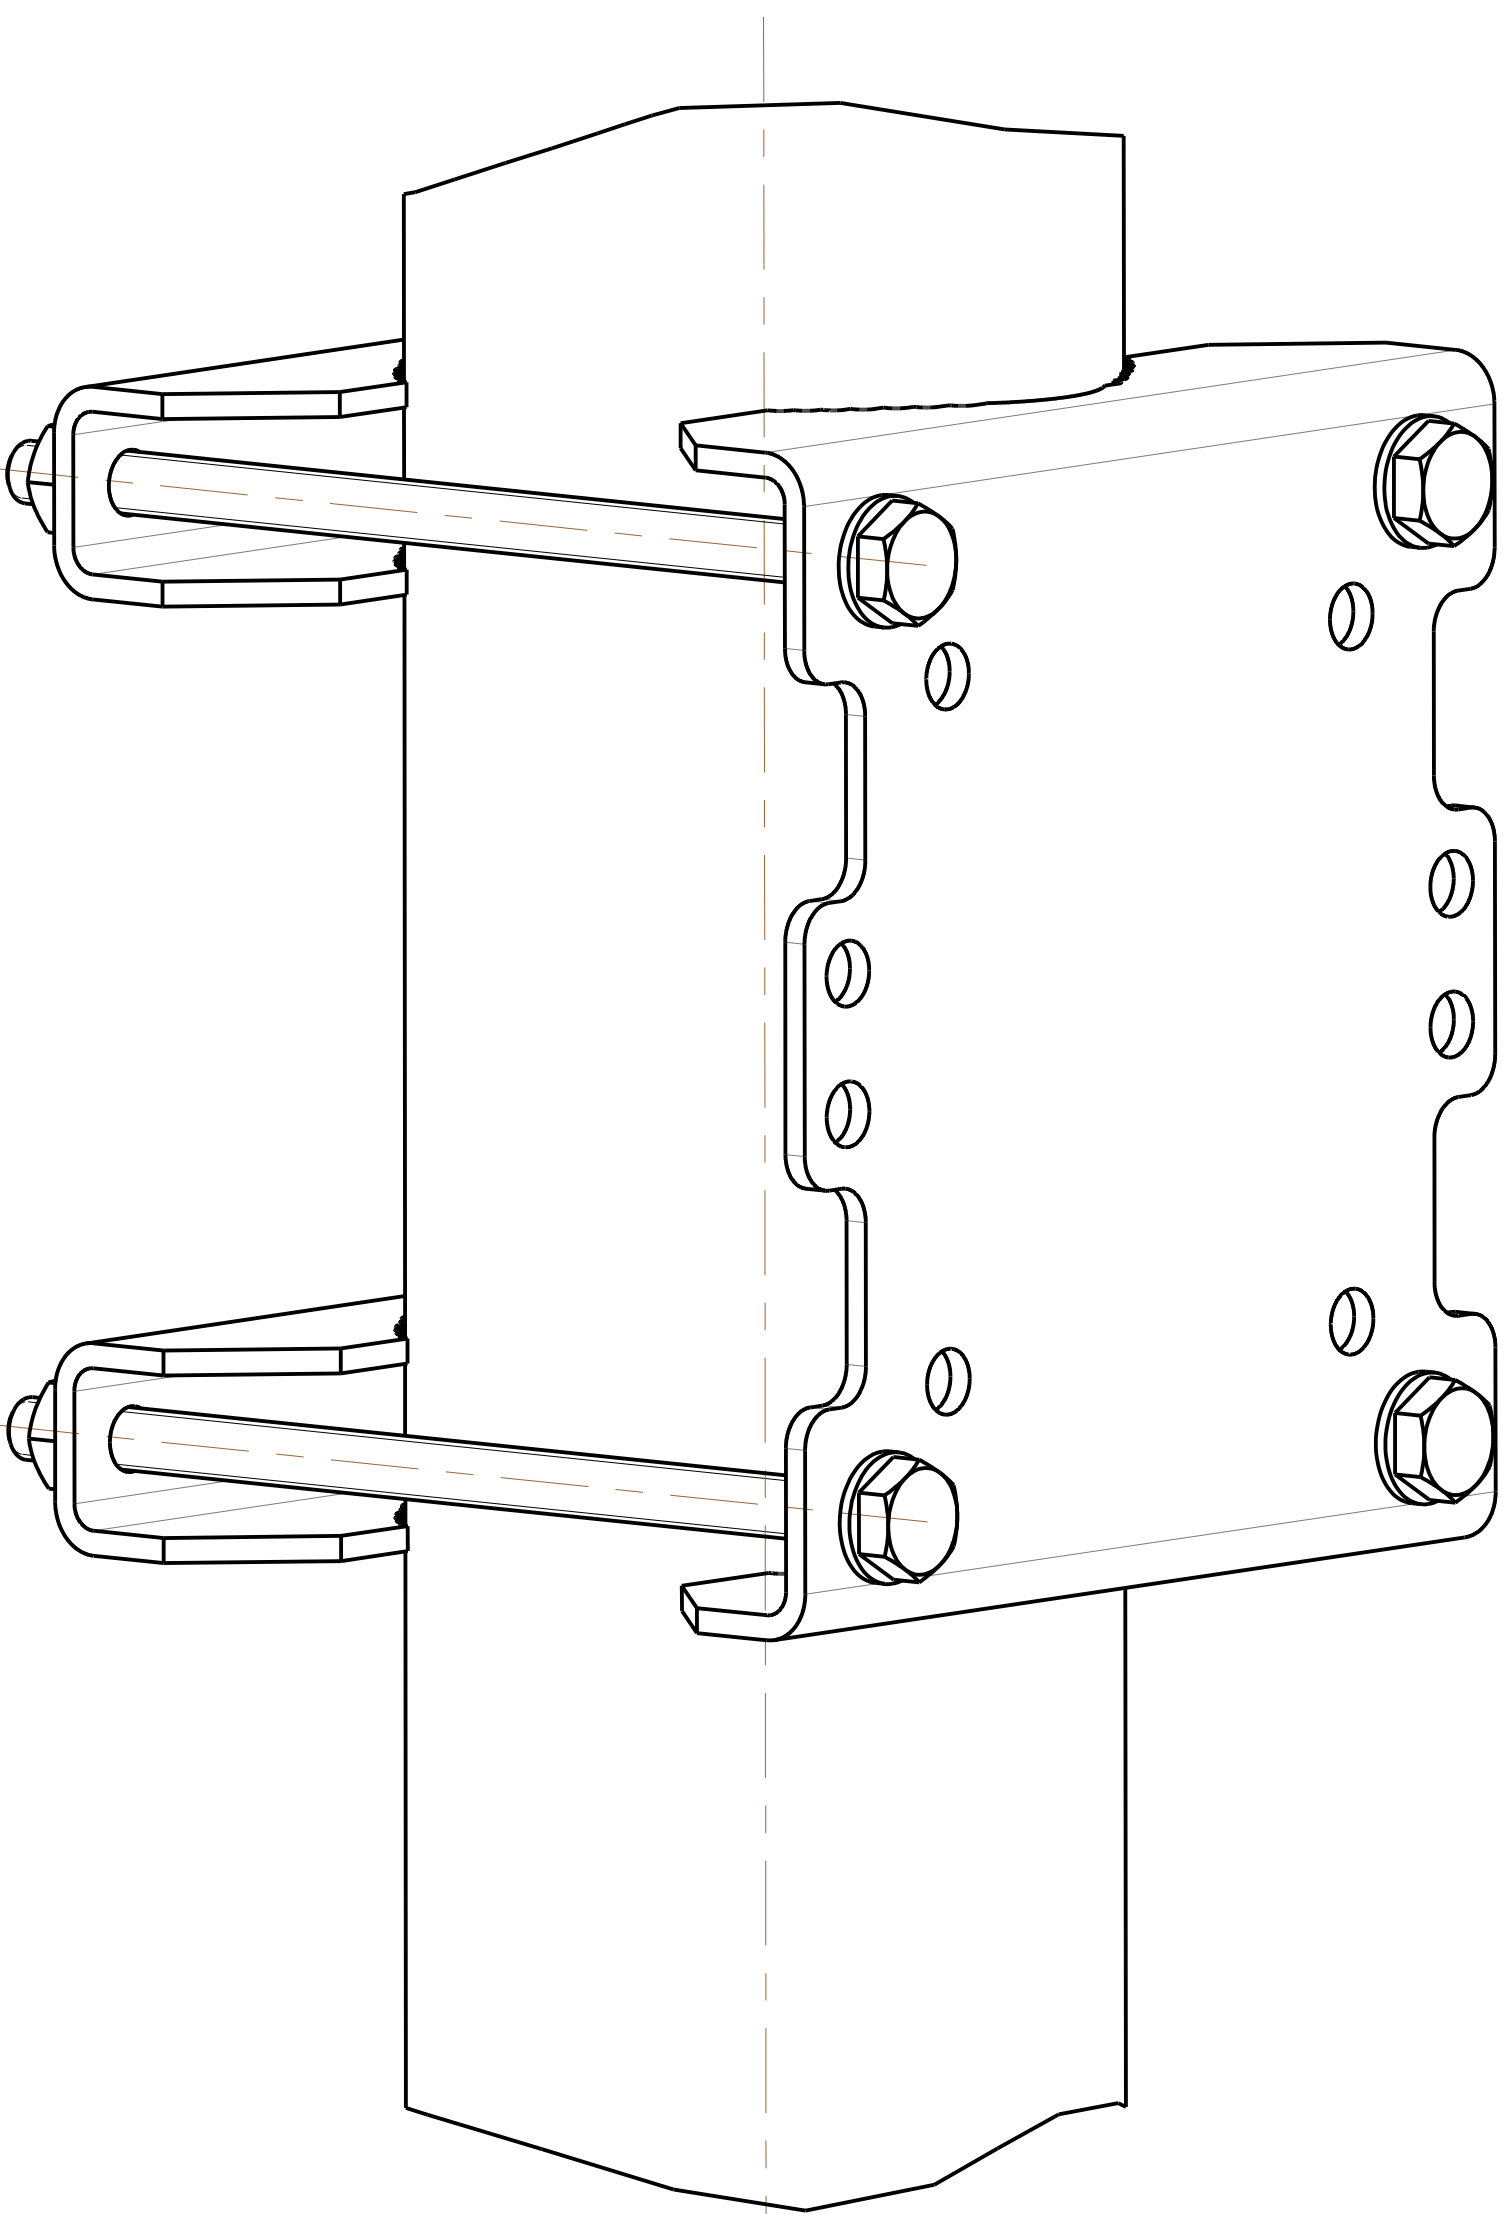

STEP 2B (Elevation range -35°/-5°)

Fix the pole mount in "B" position (-20°)
to adjust the elevation from -35° to -5°

